



Cruysberghs
bvba
Chemical

Producer of construction specialty chemicals **REAXYL**[®]

Approved BASF Construction Chemicals partner




Dealer of PCI tile adhesive systems and construction chemical additives



Reaxyl[®] ZX-290

Glue and sealant for insulation boards



Cruysberghs Chemical bvba, Heppensesteenweg 56, B- 3945 Ham
Tel.: +32 11 72 71 66 Fax : +32 11 72 71 51
info@cruysberghs.be - www.cruysberghs.be

Application:

Reaxyl® ZX-290 is a 1-K elastomer glue and sealant for gluing and finishing vapour proof all seams and joints of vapour proof insulation boards.


With **Reaxyl® ZX-290** the buildings stays Blower Door proof, even after 10 years.

Reaxyl® ZX-290 cannot detach from the surface like tape with a thermoplastic glue ridge.

Reaxyl® ZX-290 is instantly waterproof, shockproof and impact resistant, 290 % elastic, lead-free and has an excellent adhesion on most surfaces.

Reaxyl® ZX-290 is UV and wear resistant.

Reaxyl® ZX-290 is 100% Blower Door proof.

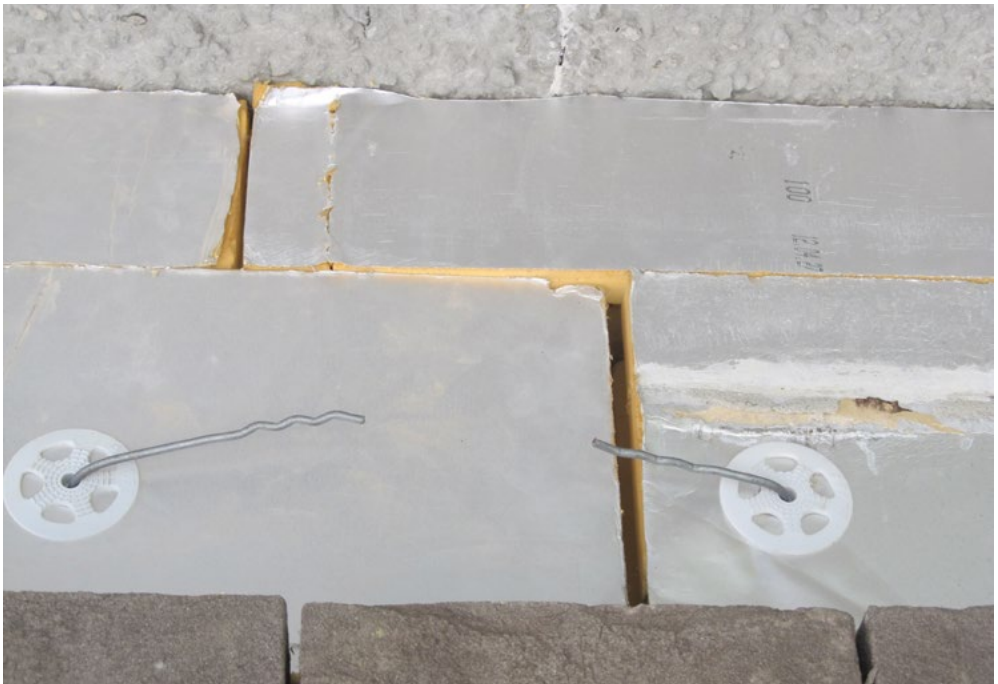

Prevents air leaks and makes your building Blower Door proof.

With **Reaxyl® ZX-290** the insulation boards stay vapour and air tight, even after 10 years.

Instructions

Apply **Reaxyl® ZX-290** on a clean surface. The surface may be slightly moist. Possibly even out with a finger of spatula. The seams of the insulations boards can be easily sealed if these are first pressed inward with a round wooden handle (1 – 2 mm). Some insulation boards are formed like this in production.





Prevents air leaks because of detaching of tapes with a thermoplastic glue ridge.
With **Reaxyl® ZX-290** the insulation boards stay vapour and air tight, even after 10 years.

Technical information

By 23°C / 50 % rH:

- Skin formation 8 min
- Stick-free after 24 min
- Hard after 12h
- Volume shrinkage after hardening < 3%
- Vapour diffusion resistance: $\mu = 6000$
- UV resistant
- Pulling strength: 2,25 N/mm²
- Stretch by break DIN 53504 > 290%
- Does not contain isocyanates. Non-toxic.
- Hardness DIN 53504: 58 shore A
- Processing temperature: +5 to +40°C
- Stockage: 1 year cool and dry
- When in doubt do some test.
- Safety information sheet is for professional user available on demand.

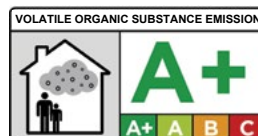

Solutions for all your construction problems

webshop

www.cruysbergghs.com



Cruysbergghs

bvba

Chemical

Cruysbergghs Chemical bvba
Heppensesteenweg 56
3945 Ham - Belgium
Tel: +32 11 72 71 66
Fax: +32 11 72 71 51
E-mail: info@cruysbergghs.be
Website: www.cruysbergghs.be

© 2018 Cruysbergghs Chemical bvba - All rights reserved. All images are property of Cruysbergghs Chemical bvba. The logos of BASF and PCI are property of BASF Chemical Company. All information distributed through this document is for information purposes only, without adverse recognition, nor any other warranty than those resulting from the sale of our products, within the bounds of our terms and conditions. Users must always consult our last published technical data sheets; a copy of which is available upon request. The information indicated above is the result of a thorough study, previous data are hereby invalid. Test this product yourself and test whether it is satisfactory for your goals. We are not responsible for any misuse of our products or damage, nor do we guarantee if our products were not suitable for your particular purposes. Nobody has the right to give guarantees or guidelines in our name about this product, that are beyond the contents of this information sheet.